
8" Heavy Duty, Industrial Grade, Ergonomically Designed Centrifugal Blowers for Non-Hazardous Locations

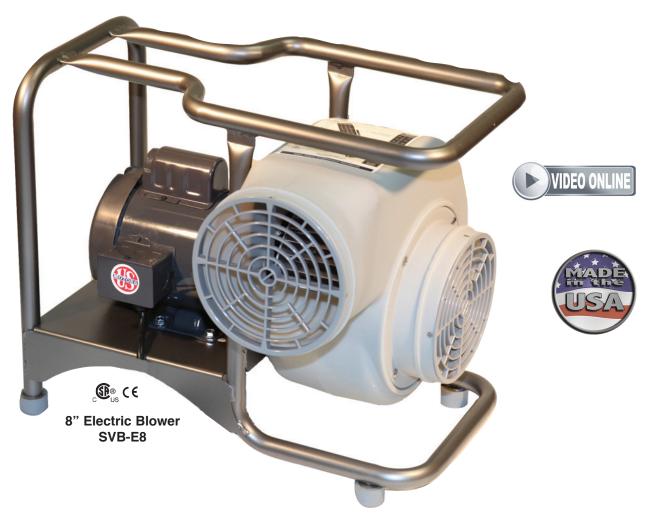

Model	Model No.	Speed	Free Air	25' 1-90° Bend	25' 2-90° Bends
Economy Blower (60 Hz)	SVB-E8EC	1 Speed	1,390 CFM	931 CFM	779 CFM
Standard Blower (60 Hz)	SVB-E8	1 Speed	1,570 CFM	1,047 CFM	873 CFM
Standard Blower (50 Hz)	SVB-E850	1 Speed	1,308 CFM	873 CFM	728 CFM
2-Speed Blower (60 Hz)	SVB-E8-2	High	1,570 CFM	1,047 CFM	873 CFM
		Low	750 CFM	490 CFM	425 CFM
Gasoline Blower	SVB-G8	High	3,000 CFM	1,725 CFM	1,295 CFM
		Low	1,500 CFM	1,040 CFM	870 CFM

Key Details:

- 8" intake and exhaust
- Non-sparking aluminum blower wheel
- Polyethylene fan housing & safety guards
- Molded polyethylene safety guards
- Powder coated tubular steel frame, dual handles

Applications

- Confined Space Entry
- Tank Entry
- Sewer Repair
- Construction & Maintenance